


KLA-40-040-0F1-2 ELECTRIC LINEAR ACTUATOR

KOMP-ACT



With programmable motion and automatic calibration

TECHNICAL DATA

Continuous force	F_c	[N]	10
Peak Force	F_p	[N]	30
Continuous current	I_c	[A]	1
Peak current	I_p	[A]	6
Phase resistance	R_p	[Ohm]	3.3
Stroke length	S_{max}	[mm]	40
Repeatability		[mm]	± 0.1
Precision		[mm]	± 0.5
Acceleration	Acc_{max}	[m/s ²]	100
Top speed	V_{max}	[m/s]	2.0
Max cycles per minute (*)			200
Lifecycle (**)	Max cycles		20 Mio.
Power supply	DC	[V]	24 or 48
Operating temperature	T_{op}	[°C]	-20...+45
Slider mass	M_s	[kg]	0.15
Total mass	M_T	[kg]	1.00
Rod bearings	Sintered bronze		
Housing Material	Hard-anodized aluminium (aerospace grade)		
Shaft Material	Hard chrome plated steel		


Notes:

- KLA actuators shall be used with KOMP-ACT's electronic controller KDRV-1-MK
- (*) For horizontal applications (unsupported)
- (**) Horizontally tested, unsupported, with a mass of 200 grams at 200 cycles per min at 0.4 m/s speed

OPERATION PERFORMANCE

Actuator speed VS. attached mass: various strokes


Horizontal Operation

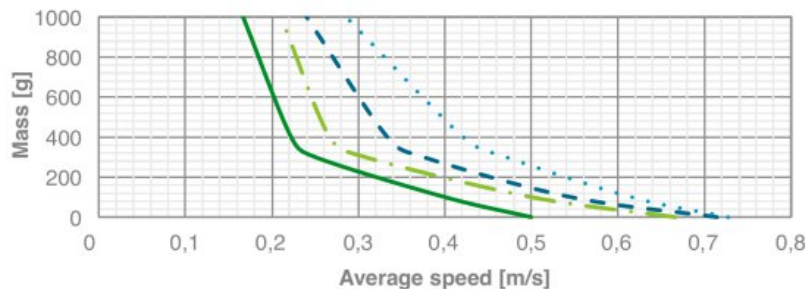

Transfer time in ms for an applied mass

Mass [g]	Stroke [mm]			
	10	20	30	40
0	20	30	40	55
100	25	40	55	65
300	35	60	75	85
400	45	75	90	95
1000	60	95	125	140

Vertical Operation

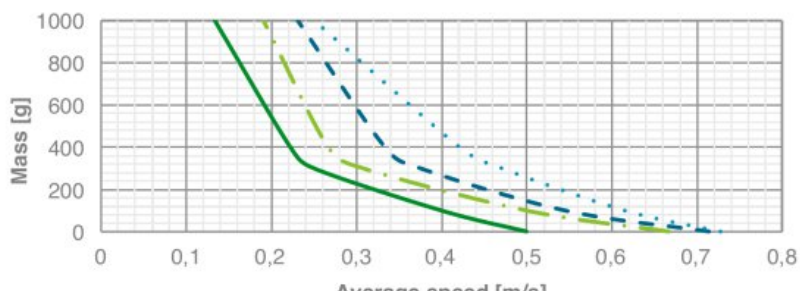

Transfer time in ms for an applied mass

Mass [g]	Stroke [mm]			
	10	20	30	40
0	20	30	40	55
100	25	40	55	65
300	35	60	75	85
400	45	75	90	95
1000	75	105	130	160

Average speed [m/s]

Stroke  10mm  20mm  30mm  40mm

www.komp-act.com
info@komp-act.com

© 2020 KOMP-ACT SA
ALL RIGHTS RESERVED

Edition 6 12/10/2020
Subject to alterations