


KLA-40-040-0F3-2 ELECTRIC LINEAR ACTUATOR

KOMP-ACT



With programmable motion and automatic calibration

TECHNICAL DATA

Continuous force	F_c	[N]	30
Peak Force	F_p	[N]	90
Continuous current	I_c	[A]	1.8
Peak current	I_p	[A]	6
Phase resistance	R_p	[Ohm]	6.6
Stroke length	S_{max}	[mm]	40
Repeatability		[mm]	± 0.1
Precision		[mm]	± 0.5
Acceleration	Acc_{max}	[m/s ²]	100
Top speed	V_{max}	[m/s]	2.0
Max cycles per minute (*)			200
Lifecycle (**)	Max cycles		20 Mio.
Power supply	DC	[V]	24 or 48
Operating temperature	T_{op}	[°C]	-20...+45
Slider mass	M_s	[kg]	0.26
Total mass	M_T	[kg]	1.46
Rod bearings	Sintered bronze		
Housing Material	Hard-anodized aluminium (aerospace grade)		
Shaft Material	Hard chrome plated steel		


Notes:

- KLA actuators shall be used with KOMP-ACT's electronic controller KDRV-1-MK
- (*) For horizontal applications (unsupported)
- (**) Horizontally tested, unsupported, with a mass of 500 grams at 200 cycles per min at 0.4 m/s speed

OPERATION PERFORMANCE

Actuator speed VS. attached mass: various strokes


Horizontal Operation

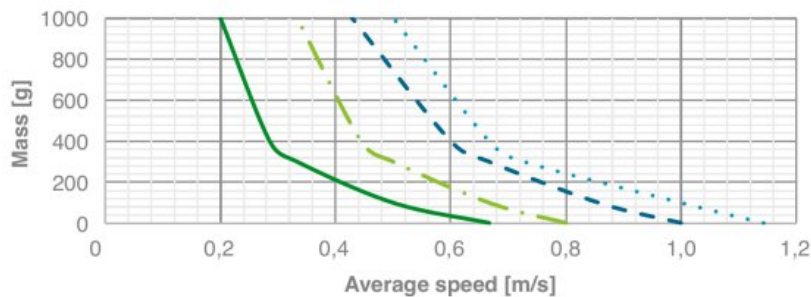

Transfer time in ms for an applied mass

Mass [g]	Stroke [mm]			
	10	20	30	40
0	15	25	30	35
100	20	30	35	40
300	30	40	45	50
400	35	45	50	60
1000	50	60	70	80

Vertical Operation

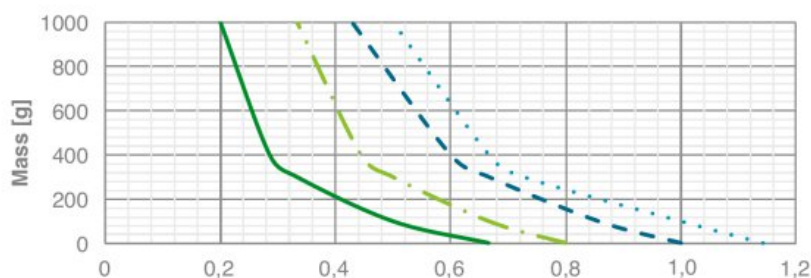

Transfer time in ms for an applied mass

Mass [g]	Stroke [mm]			
	10	20	30	40
0	15	25	30	35
100	20	30	35	40
300	30	40	45	50
400	35	45	50	60
1000	50	60	70	80

